
dormakaba

TS Compakt
Door closer

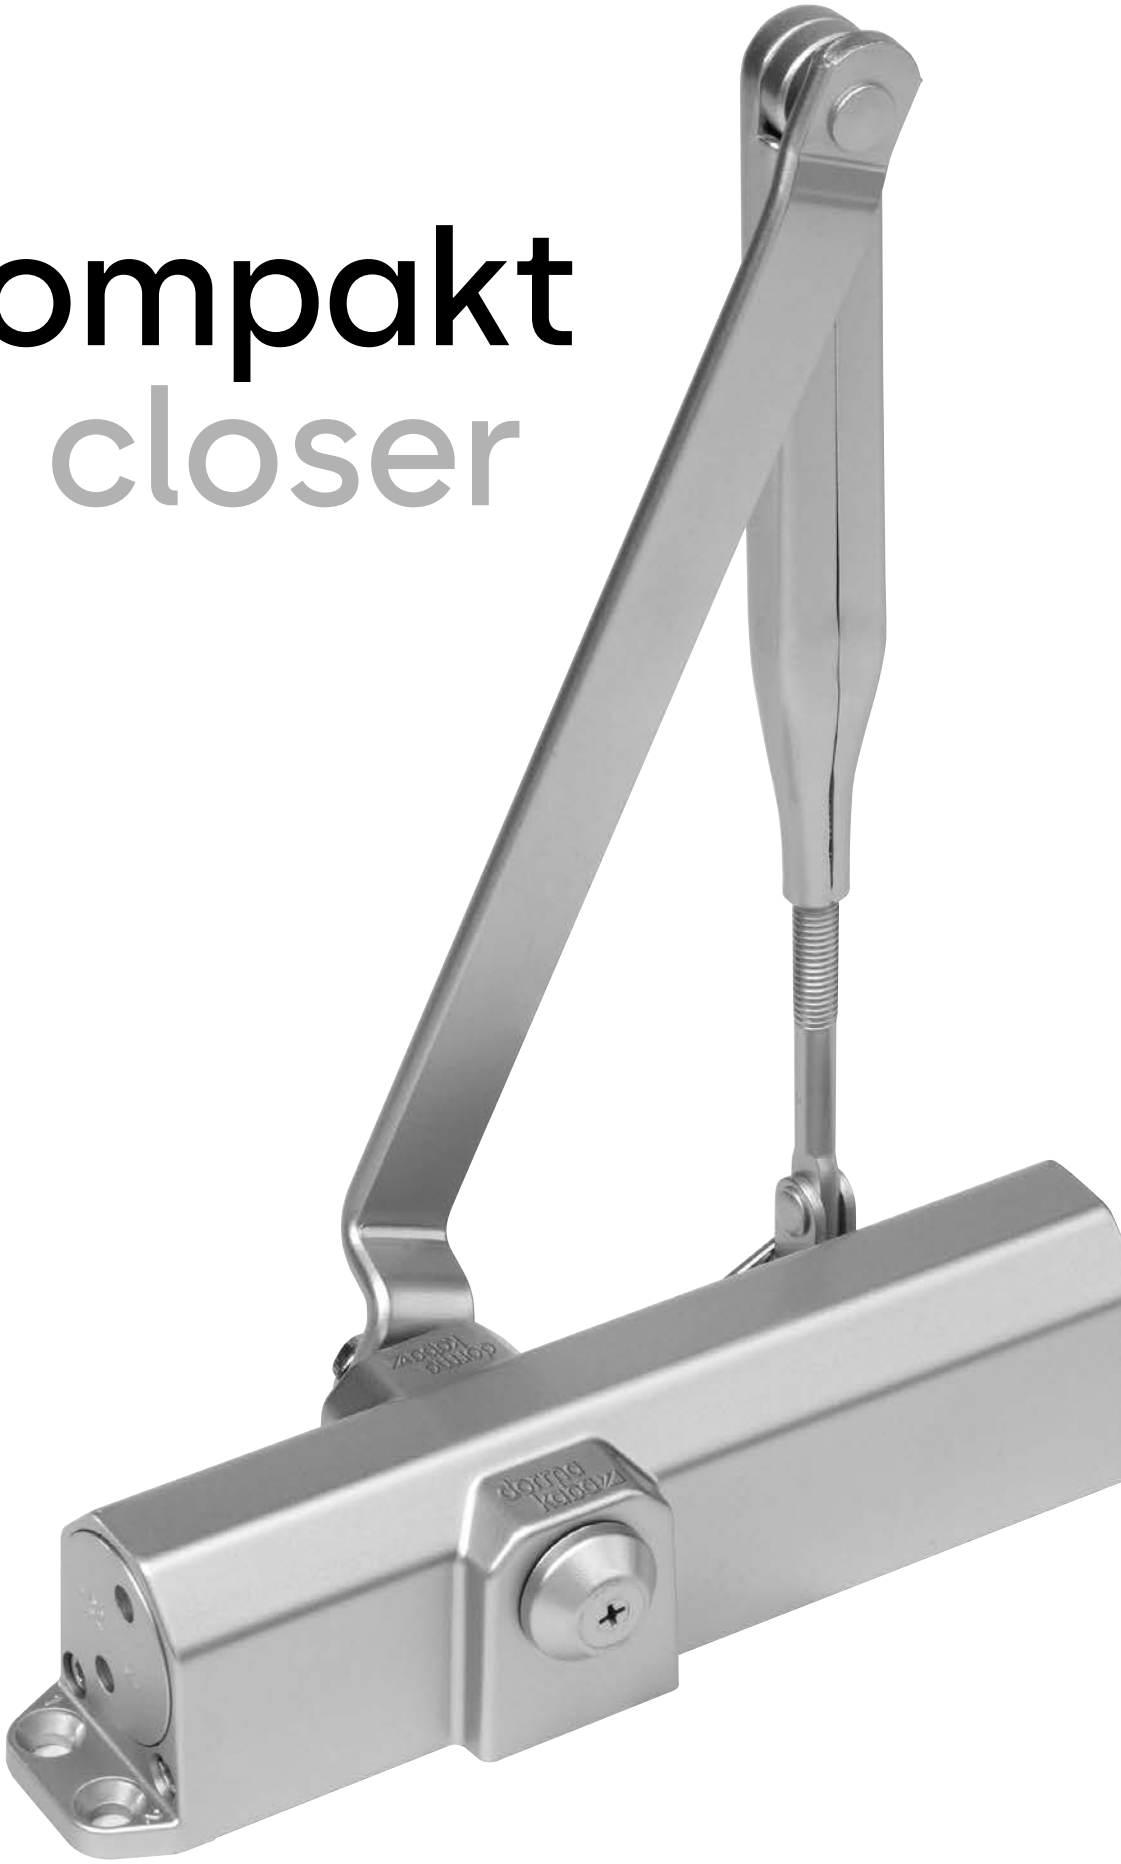

Technical Product Brochure

The ideal cost-efficient solution for standard doors

With the TS Compakt, dormakaba has developed a door closer which can be universally used on all common door types. It is particularly quick and easy to install – and does not require a mounting backplate. Changes in templating allow easy selection of the closinag force to suit various door sizes.

Certified to ISO 9001

Plus points

For the trade

- Ideal solution for standard doors.
- Just one model for all sizes to simplify stocking.

For the user

- Two valves for optimum closing speed.

For the installer


- Non-handed unit.
- Quick and easy to install.
- Fixes perfectly to all door types without the need for a mounting backplate.
- One model for all mounting positions.

Data and features		TS Compakt
Closing force, adjustable		2/3/4
Standard doors*	≤ 1100 mm	●
External doors, opening outwards*		–
Fire and smoke check doors*	≤ 1100 mm	–
Non-handed		●
Arm	Standard	●
	Slide channel	–
Closing speed adjustable	180° – 15°	●
at 2 seperate valves	15° – 0°	●
Backcheck		–
Delayed action		–
Hold-open		○
Weight in kg		1.2
Dimensions in mm	Length	205.0
	Overall depth	46.0
	Height	40.0
C UL US		●


● Yes – no ○ Option

* For high and heavy doors, external doors, and for doors required to close against high wind pressure, we recommend dormakaba TS 83.

Functions

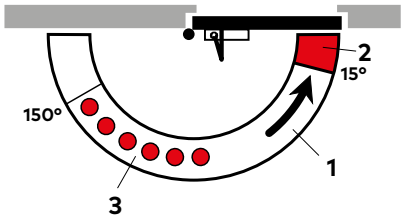


1 Adjustable closing speed in the range 180° – 15°.
2 Adjustable closing speed in the range 15° – 0°.
3 Hold-open range with hold-open arm model (optional extra).

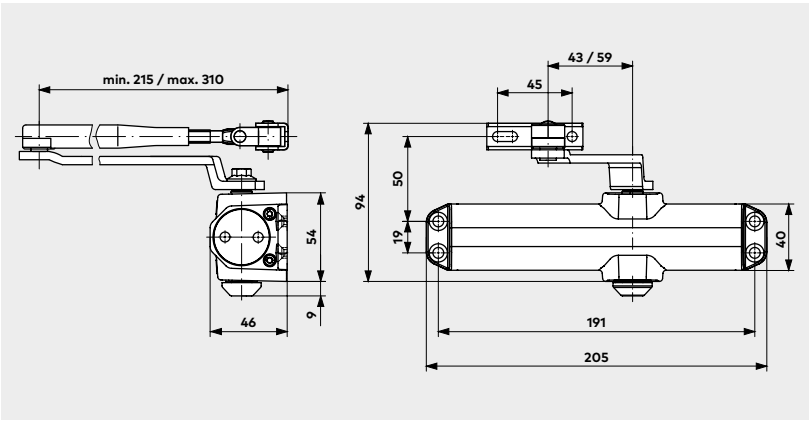

Closing force settings


Door width	Size setting
≤ 850	Size 2
≤ 950	Size 3
≤ 1100	Size 4

The TS Compakt size setting is selected for the door width by moving the closer body and/or turning the arm power shoe.

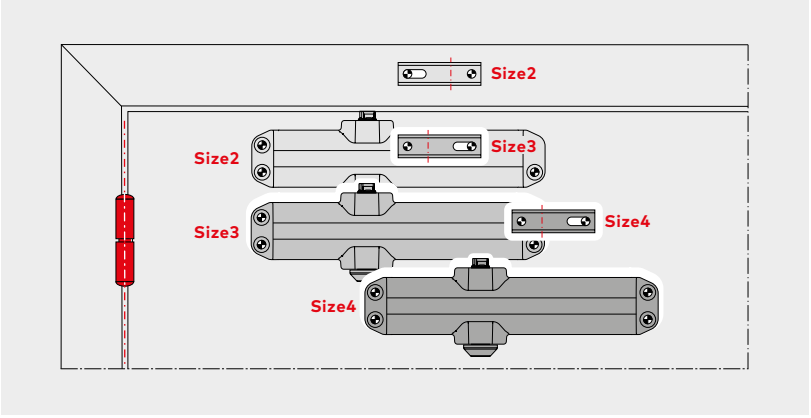


Door-leaf fixing, pull side

	Size 2	Size 3	Size 4
A	170.0	170.0	250.0
B	59.0	43.0	43.0
C	96.5	96.5	176.5
D	198.5	198.5	278.5
E	89.0	89.0	169.0

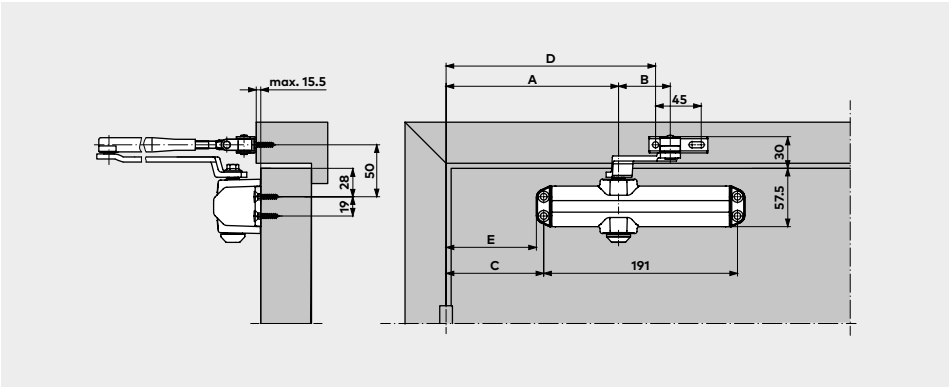

Frame fixing, push side

	Size 2	Size 3	Size 4
A	170.0	170.0	250.0
B	59.0	43.0	43.0
C	96.5	96.5	176.5
D	198.5	198.5	278.5
E	89.0	89.0	169.0

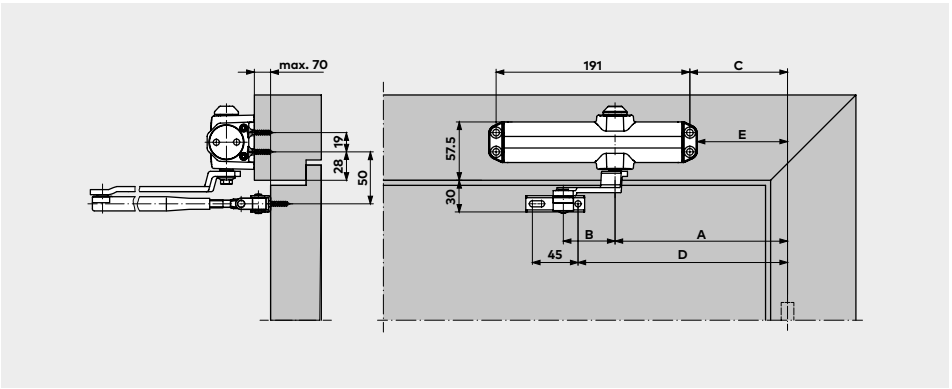

Note
On the application for size 4 (UL), move the door closer body 13 mm in the opposite direction of the door hinge from the above stated position for size 4.


Standard equipment

Color

Silver	01
Silver	03
Silver	11
black (RAL 9005)	19


Order number:
■□ - Closer with arm, compelete

Door Closer – TS Compakt




Size EN 2/3/4

Standard arm



■□ 670101xx

Hold-open arm



■□ 670102xx

Note
If the use of a door closer with mounting plate is required, we recommend dormakaba TS 73 V, TS 72, TS 71.

Specification text
Rack and pinion door closer with selectable closing force, size 2, 3 and 4 and adjustable closing speed in two independent ranges. Non-handed.

Model
☐ with standard arm
☐ with hold-open arm

Colour
☐ silver
☐ brown
☐ white (similar to RAL 9016)
☐ black (similar to RAL 9005)

Make
dormakaba TS Compakt



Door
Hardware



Electronic
Access & Data



Mechanical
Key Systems



Lodging
Systems



Entrance
Systems



Interior Glass
Systems





SECURITAL S.r.l.
VIA DEL COMMERCIO 14 - 20832 DESIO (MB)
Tel. ++39-(0)362-630393
www.securital.it - info@securital.it